

Accesses for tram maintenance operations



Raw extruded aluminum
100 x 30 mm access for **tram
nose maintenance**

Capacity of load:
200 kg – 2 people

Height to serve: 2 500 mm
Access staircase useful width:
600 mm


Anti-slip ribbed aluminum
steps depth 230 mm

Platform size:
2 860 x 1 600 mm

Checkered aluminum flat
sheet – thickness 4.4 mm

Guardrail with yellow
lacquered handrail (RAL
1023), intermediary rail and
baseboard.

4 wheels Ø 200 mm mounted
on jack with crank handle
Lorry wheels for rail guidance.

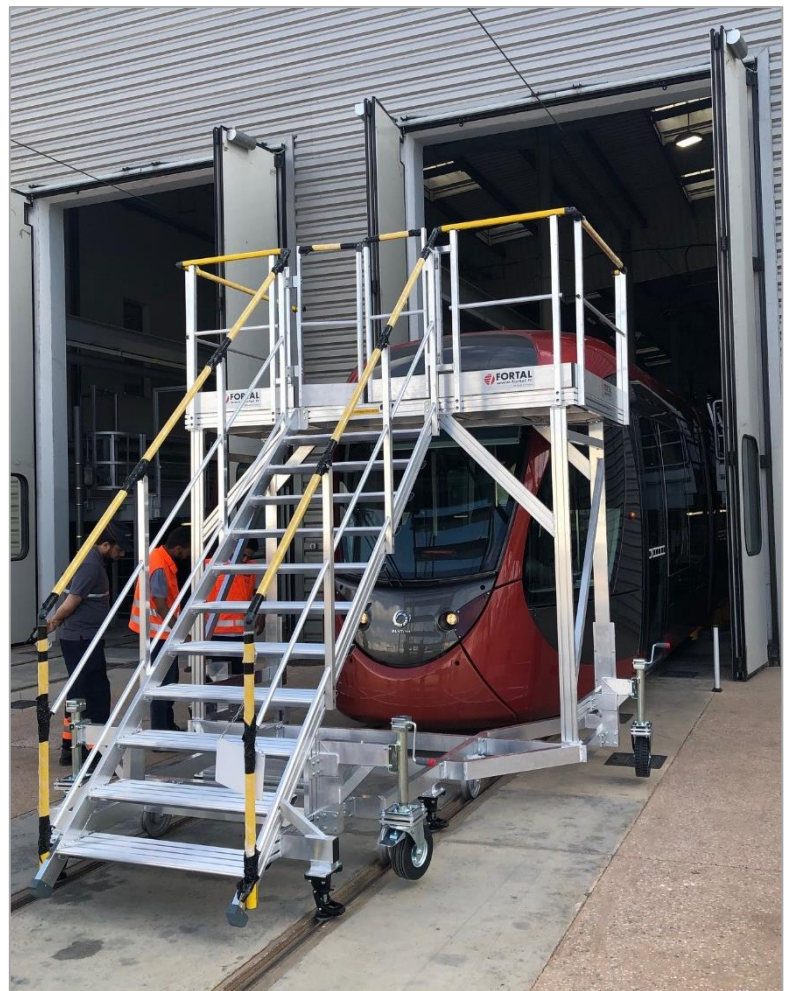

 **FORTAL**[®]
www.fortal.fr
DIVISION TRANSPORT  Made in France