## In height adjustable platform for maintenance on bus roofing



3D view platform in height position with guardrail deployed



Platform for maintenance operations on hybrid bus roofing. In height adjustable mobile platform from 2 900 mm to 3 900 mm by hydraulic pump from the floor Galvanised steel frame, raw extruded aluminium structure. Access by variable angle stairs.


Capacity of load: 200 kg - 2 persons + tools.



## In height adjustable platform for maintenance on bus roofing



Articulated guardrail deployed from 2 000 to 2 550 mm – height 1 100 mm - allows the security of the operators by working on the bus roofing.

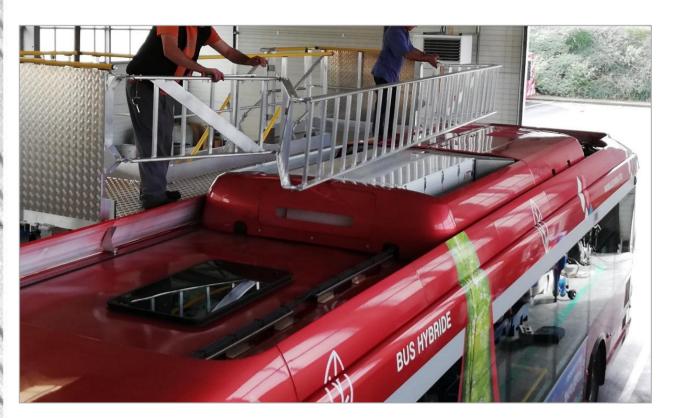

Flat sheet checkered platform thickness 4.4 mm - length 5 950 mm x width 1 540 mm

Rubber protection on bus side.

Easy to move thanks to 6 swivel wheels with brakes Ø 200 mm with polyurethane tyres for workshop use.

Guardrail with yellow lacquered handrail, intermediary rail and baseboard.

