
## Platform and structure for wind turbine hub assembly unit



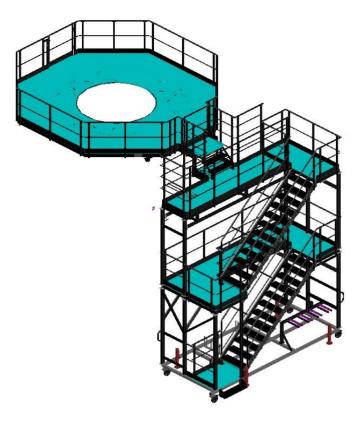

Raw extruded aluminum main structure 110 x 35 mm composed with:

- -Access tower with two levels. Height: 7 meters with amovible plaform to put on the to level for elevate
- -Hexaginal platform : widht 3 meters equipped with galvanised steel fixing foot

Capacity of load: 450 kg (4 peoples) on the tower access – 1 tonne distribute on platfrom.



## Platform and structure for wind turbine hub assembly unit





Access tower staircase widht 800 mm – anti-slip ribbed aluminum depth 230 mm – guardrail with handrail, intermediary rail and baseboard – immobilization crank – brake wheels Ø 200 mm.

Checker aluminum coating platform – rubber shockproof protection around the cut– guardrail with two security gates diametrically opposed – plug and connection of compressed air.



Fixation system of tower access to hub – platform standd on its foot – galvanised steel bracket screw on the hub for receive the gangway.

