


Staircases and landings to circulate on oil depot

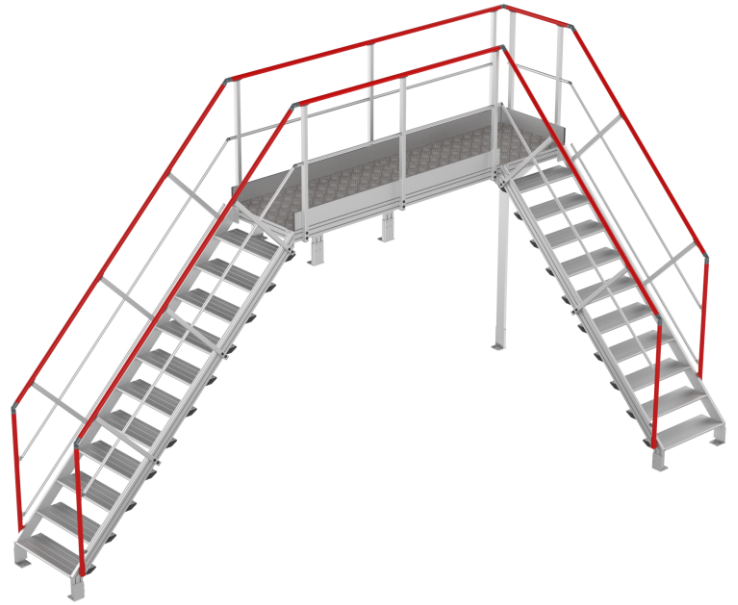

Raw extruded aluminum 100 x 30 mm double access staircase for crossing.

Staircases :

- Height to serve: 2550 and 2215 mm
- Staircases tilt: 45°
- Anti-slip steps depth 261 mm
- Useful width: 750 mm

Landing platform

- Width : 810 mm – Length : 3157 mm
- Coating : flat sheet checkered aluminum

Guardrail

- Ramps with red lacquered handrail, and intermediary rail
- Guardrail with red lacquered handrail, intermediary rail and baseboard.

Capacity of load: 200 kg/m²

F891700358– november 2021

 **FORTAL**[®]
www.fortal.fr
DIVISION INDUSTRIE  Made in France

Head Office & Plants : ZI du Muckental – F – 67140 BARR
Phone +33(0)3 88 58 53 53 – Fax +33(0)3 88 58 53 54
www.fortal.fr/en – info@ortal.fr

Staircases and landings to circulate on oil depot



Raw extruded aluminum 100 x 30 mm double access staircase for crossing. The staircase is integrated into an existing structure.

Staircases

- Height to serve: 890 et 1840 mm
- Staircases tilt: 46 and 40°
- Anti-slip steps depth 230 mm

Landing platform

- Width : 800 mm – Length: 1600 mm
- Coating : flat sheet checkered aluminum

Guardrail

- Ramps with raw aluminum handrail, and intermediary rail
- Guardrail with raw aluminum handrail, intermediary rail and baseboard

Capacity of load: 200 kg/m²

F892100238 – november 2021

 **FORTAL**[®]
www.fortal.fr
DIVISION INDUSTRIE  Made in France

Head Office & Plants : ZI du Muckental – F – 67140 BARR
Phone +33(0)3 88 58 53 53 – Fax +33(0)3 88 58 53 54
www.fortal.fr/en – info@ortal.fr

Staircases and landings to circulate on oil depot



Raw extruded aluminum 100 x 30 mm unequal double access staircase for crossing.
The staircase is integrated into an existing structure.

Staircases

- Height to serve: 850 and 2210 mm
- Staircases tilt: 46 and 40°
- Anti-slip steps depth 230 mm
- Useful width: 770 mm

Landing platform

- Width : 830 mm – Length : 1900 mm
- Coating : flat sheet checkered aluminum

Guardrail

- Ramps with raw aluminum handrail, and intermediary rail
- Guardrail with raw aluminum handrail, intermediary rail and baseboard


Capacity of load: 200 kg/m²

 **FORTAL**[®]
www.fortal.fr
DIVISION INDUSTRIE  Made in France

F892100239 – november 2021

Head Office & Plants : ZI du Muckental – F – 67140 BARR
Phone +33(0)3 88 58 53 53 – Fax +33(0)3 88 58 53 54
www.fortal.fr/en – info@ortal.fr

Staircases and landings to circulate on oil depot

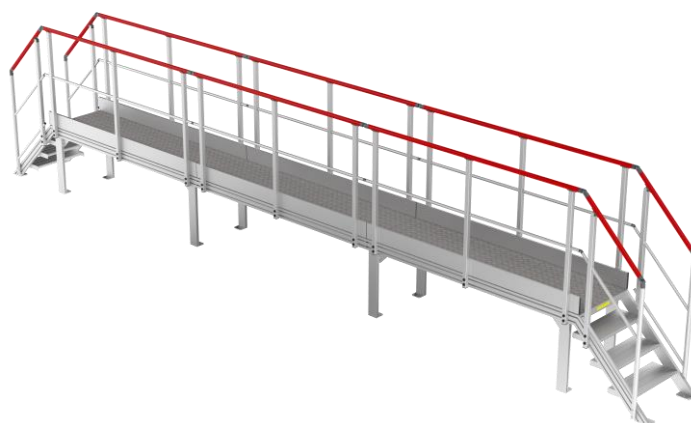

Before



After

Raw extruded aluminum 110 x 35 mm double staircase for pipes crossing.

Staircase

- Height under platform: 640 mm
- Staircases : 45°
- Anti-slip steps depth 261 mm
- Useful width: 640 mm

Landing platform

- Width: 710 mm – Length under platform: 6800 mm
- Coating : flat sheet checkered aluminum

Guardrail

- Ramps with red lacquered handrail, and intermediary rail
- Guardrail with red lacquered handrail, intermediary rail and baseboard.

Capacity of load: 200 kg/m²
Complies with standard NF E 85-015

F892100304 – november 2021

 **FORTAL**[®]
www.fortal.fr
DIVISION INDUSTRIE  Made in France

Head Office & Plants : ZI du Muckental – F – 67140 BARR
Phone +33(0)3 88 58 53 53 – Fax +33(0)3 88 58 53 54
www.fortal.fr/en – info@ortal.fr